



Part number: U12000004 - Model: SUM-P15 CR U H




TECHNICAL CHARACTERISTICS	
Power supply:	Direct current
Detection type:	Diffuse reflective
Working voltage:	15 ÷ 30V
Detection range:	20 ÷ 150 mm
Blind range:	20mm
Transducer direction:	Axial
Teach-in:	Present
Output type:	Analogue
Function (Analogic output):	0 ÷ 10 V (RL > 1 KOHM)
Temperature error:	< =1.5 %FS
Working frequency:	400 KHz
Led indicator:	Led yellow/red
Absorption:	30 mA
Temperature limits:	0 ÷ +70 °C
IP rating:	IP65
Housing material:	Nickel plated brass/TEFLON
Mechanical characteristics:	M12x1
Connection type:	H Connector
Weight:	25g



Part number: U12000004 - Model: SUM-P15 CR U H

WIRING DIAGRAM

CONNECTION WITH H PLUG




VIEW OF MALE CONNECTOR

- 1 = Brown / +24Vdc
- 2 = White / teach
- 3 = Blue / 0V
- 4 = Black / binary output

INSTRUCTIONS FOR CORRECT INSTALLATION

DETECTION RANGE

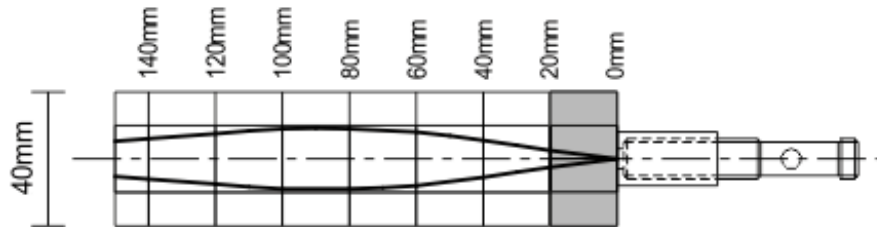

The detection beam of an ultrasonic sensor has the shape of a cone.
The cone of sensitivity can vary in function of the detected object. The typical curve of the cone is shown in the graphic.
The cones of sensitivity of two different ultrasonic sensors with the same operating frequency must NEVER intersecate, or they do not work properly.